

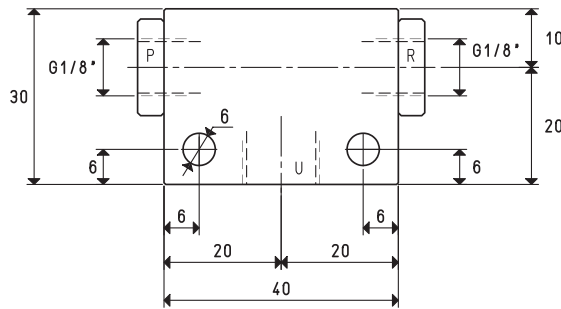


SINGLE-STAGE VACUUM GENERATORS PVP 2 and PVP 3

With their extremely reduced size and high performance, these single-stage vacuum generators operate exploiting the Venturi principle.

Supplying the generator with compressed air in P, vacuum will be generated at connection U, while both the supply and the sucked air will be released through R.

By interrupting the air supply in P, the vacuum effect in U will also stop. The vacuum generators described in this page are generally used for interconnecting vacuum cups, for gripping and handling non-porous objects and equipment with low capacity requirements. They are made with anodised aluminium with brass ejectors.

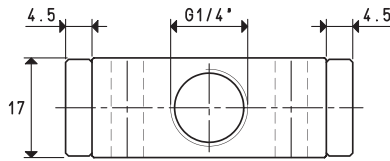

P=COMPRESSED AIR CONNECTION

R=EXHAUST

U=VACUUM CONNECTION

| Art. | PVP 2 | | |
|------------------------|-----------|-----|-----------|
| Quantity of sucked air | cum/h | 2.8 | 3.0 |
| Max. vacuum level | -kPa | 60 | 85 |
| Final pressure | mbar abs. | 400 | 150 |
| Supply pressure | bar (g) | 4 | 6 |
| Air consumption | l/s | 0.7 | 1.0 |
| Working temperature | °C | | -20 / +80 |
| Noise level | dB(A) | | 78 |
| Weight | g | | 70 |

Note: All the vacuum data indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and are obtained with a constant supply pressure.