



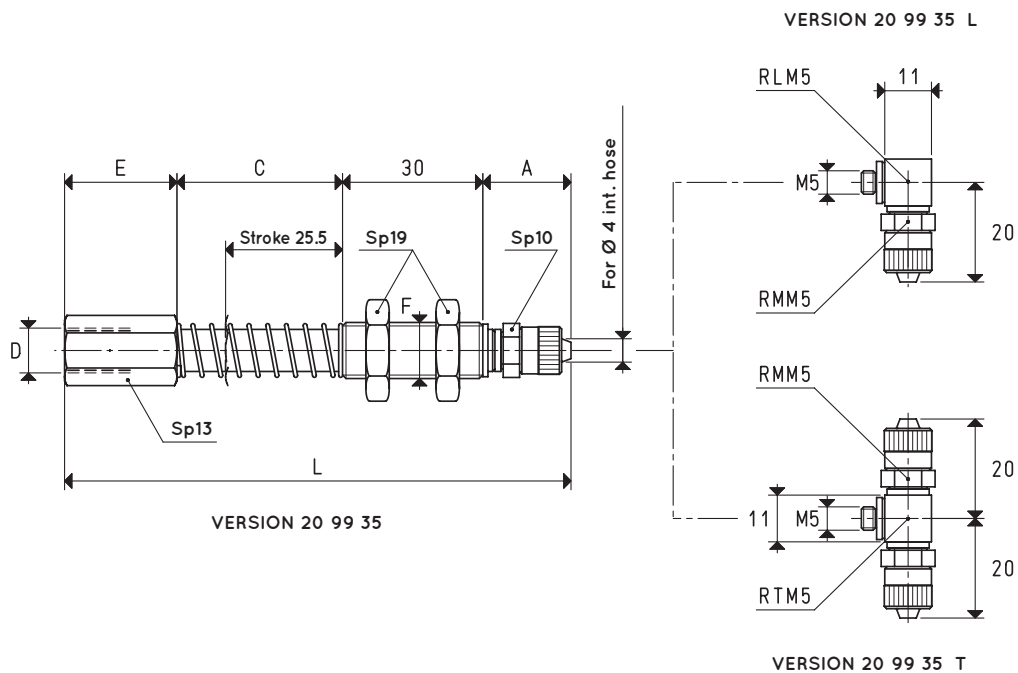

## MINI VACUUM CUP HOLDERS WITH BUILT-IN SHUT-OFF VALVE

In addition to having all the other features of the mini vacuum cup holders, these also have a built-in shut-off valve. The function of the shut-off valve is to automatically close suction when the cup is not in contact with the surface of the load to be handled or in case of a faulty grip or of considerable transpiration, thus preventing the reduction of the level of vacuum on the remaining cups of the system that are regularly gripping a load. The advantage of this is that the placement or the exclusion of the non-gripping cups is no longer binding. Vacuum cups with a minimum diameter of 10 mm and maximum diameter of 50 mm can be assembled on these cup holders, provided they have a 1/8" male threaded gas support.

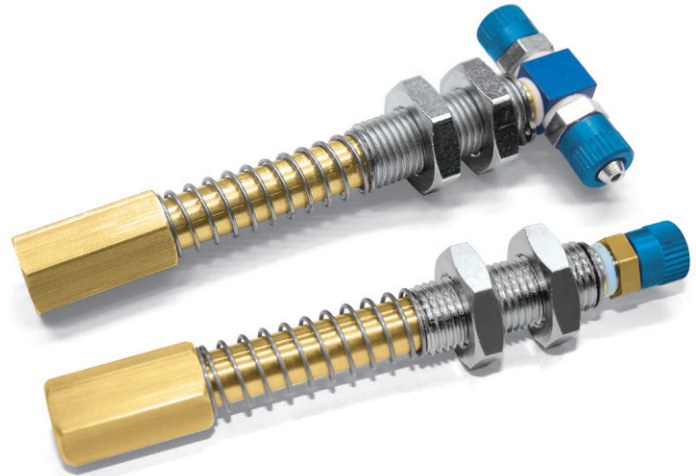

### VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 4 X 6

Item	A	C	D Ø	E	F Ø	L	Weight g
<b>20 99 35</b>	17.5	35.5	G1/8"	24	M12 x 1.25	107	84

Minimum trigger flow = 1.5 m³/h

Minimum a level of vacuum = -250 mbar

Note: To order vacuum cup holders with L or T fittings, add the letter L or T to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch =  $\frac{\text{mm}}{25.4}$ ; pounds =  $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$