

# SPECIAL ANTI-ROTATION CUP HOLDERS WITH SPHERICAL SWIVEL SUPPORT


Along with all the features of the special anti-rotation cup holders described above, these cup holders are provided with a nylon spherical swivel support which allows to place and keep the cup in the desired place.

Their fixing support is made with aluminium and is composed of two parts that, screwed together, allow to block the spherical joint, thus keeping the cup holder in place.

They are suited for cups with a diameter between 40 mm and 200 mm, but they are necessary for assembling rectangular and oval cups.

The actual springing stroke is:

- For height C= 55 mm                      37 mm
- For height C= 110 mm                    84 mm

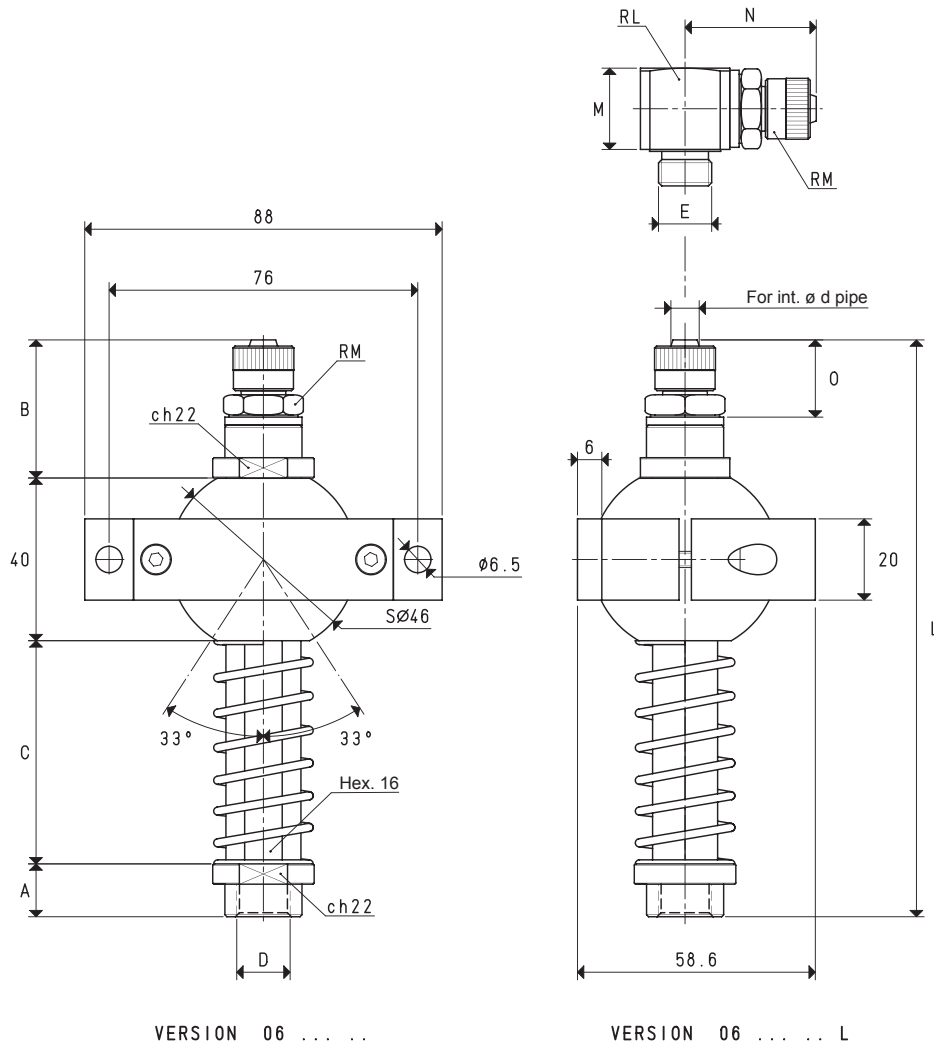

3D drawings available at [www.vuototecnica.net](http://www.vuototecnica.net)


## CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

Art.	A	B	C	D	d	E	L	M	N	O	RL	RM	Weight g
<b>06 55 100</b>	13	34	55	G1/4"	6	G1/4"	142	21.0	32.0	18.5	G1/4"	G1/4"	338
<b>06 55 101</b>	15	40	55	G3/8"	9	G3/8"	150	21.5	35.5	22.0	G3/8"	G3/8"	350
<b>06 55 102</b>	15	34	55	G3/8"	6	G1/4"	144	21.0	32.0	18.5	G1/4"	G1/4"	340
<b>06 110 100</b>	13	34	110	G1/4"	6	G1/4"	197	21.0	32.0	18.5	G1/4"	G1/4"	406
<b>06 110 101</b>	15	40	110	G3/8"	9	G3/8"	205	21.5	35.5	22.0	G3/8"	G3/8"	418
<b>06 110 102</b>	15	34	110	G3/8"	6	G1/4"	199	21.0	32.0	18.5	G1/4"	G1/4"	408

**Note:** Add the letter L to the code to order L-type fittings.

# SPECIAL ANTI-ROTATION CUP HOLDERS WITH SPHERICAL SWIVEL SUPPORT

The actual springing stroke is:  
 - For height C= 55 mm      37 mm  
 - For height C= 110 mm      84 mm

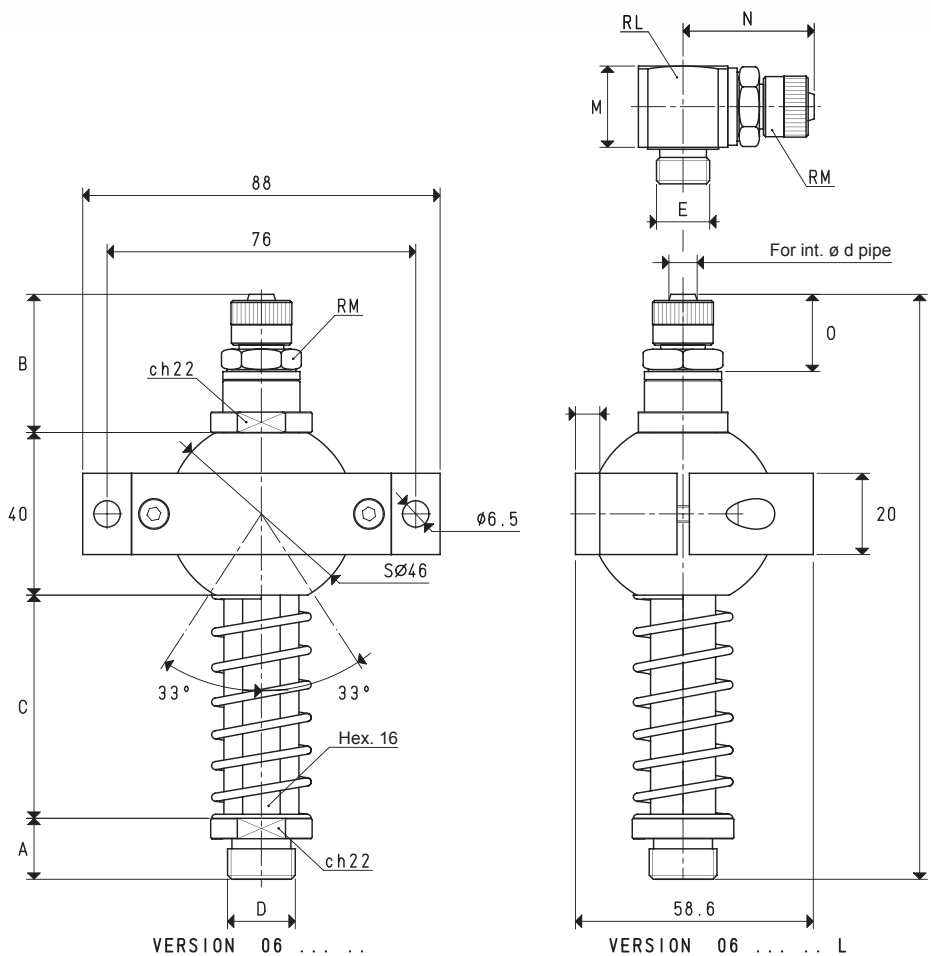

## CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

Art.	A	B	C	D	d	E	L	M	N	O	RL	RM	Weight g
				Ø	Ø	Ø							
<b>06 55 110</b>	15	34	55	G1/4"	6	G1/4"	144	21.0	32.0	18.5	G1/4"	G1/4"	334
<b>06 55 111</b>	15	34	55	G3/8"	6	G1/4"	144	21.0	32.0	18.5	G1/4"	G1/4"	340
<b>06 55 112</b>	15	40	55	G3/8"	9	G3/8"	150	21.5	35.5	22.0	G3/8"	G3/8"	350
<b>06 55 113</b>	15	40	55	G1/2"	9	G3/8"	150	21.5	35.5	22.0	G3/8"	G3/8"	352
<b>06 55 114</b>	15	34	55	M12	6	G1/4"	144	21.0	32.0	18.5	G1/4"	G1/4"	338
<b>06 55 115</b>	15	40	55	M12	9	G3/8"	150	21.5	35.5	22.0	G3/8"	G3/8"	348
<b>06 55 116</b>	15	40	55	M16	9	G3/8"	150	21.5	35.5	22.0	G3/8"	G3/8"	350
<b>06 110 110</b>	15	34	110	G1/4"	6	G1/4"	199	21.0	32.0	18.5	G1/4"	G1/4"	394
<b>06 110 111</b>	15	34	110	G3/8"	6	G1/4"	199	21.0	32.0	18.5	G1/4"	G1/4"	400
<b>06 110 112</b>	15	40	110	G3/8"	9	G3/8"	205	21.5	35.5	22.0	G3/8"	G3/8"	410
<b>06 110 113</b>	15	40	110	G1/2"	9	G3/8"	205	21.5	35.5	22.0	G3/8"	G3/8"	412
<b>06 110 114</b>	15	34	110	M12	6	G1/4"	199	21.0	32.0	18.5	G1/4"	G1/4"	398
<b>06 110 115</b>	15	40	110	M12	9	G3/8"	205	21.5	35.5	22.0	G3/8"	G3/8"	408
<b>06 110 116</b>	15	40	110	M16	9	G3/8"	205	21.5	35.5	22.0	G3/8"	G3/8"	410

**Note:** Add the letter L to the code to order L-type fittings.

Conversion ratio: inch =  $\frac{\text{mm}}{25.4}$ ; pounds =  $\frac{\text{g}}{453.6}$  =  $\frac{\text{Kg}}{0.4536}$

3D drawings available at [www.vuototecnica.net](http://www.vuototecnica.net)