



PAPER FILTERING CARTRIDGES FOR FC FILTERS


The cartridges described in this page are suited for FC suction filters.
 They are made with a special treated paper, with a filtering degree equal to $5 \div 7 \mu$, which is pleated to increase its surface and contained into a double perforated sheet steel enclosure.
 They are recommended for retaining fine and impalpable dust, but not in presence of water and oil vapours and condensation.



Art.	Filtre art.	D Ø	D2 Ø	H	Filtering degree micron
00 FC 04	FC 10	50	23	59	$5 \div 7$
00 FC 08	FC 20 - FC 25	64	38	69	$5 \div 7$

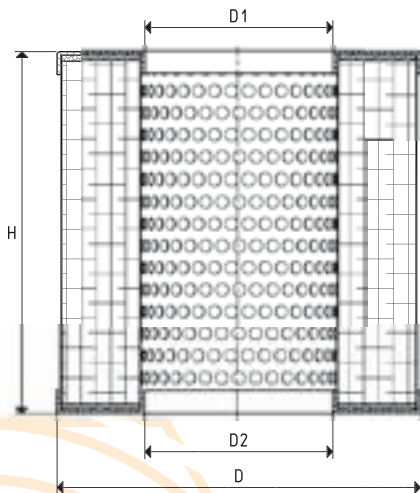

Art.	Filtre art.	D Ø	D1 Ø	D2 Ø	H	Filtering degree micron
00 FC 15	FC 30 - FC 35 - FC 38	98	60	60	70	$5 \div 7$
00 FC 22	FC 40	126	64	64	125	$5 \div 7$
00 FC 24	FC 50	126	64	64	156	$5 \div 7$
00 FC 33	FC 55	98	60	60	140	$5 \div 7$

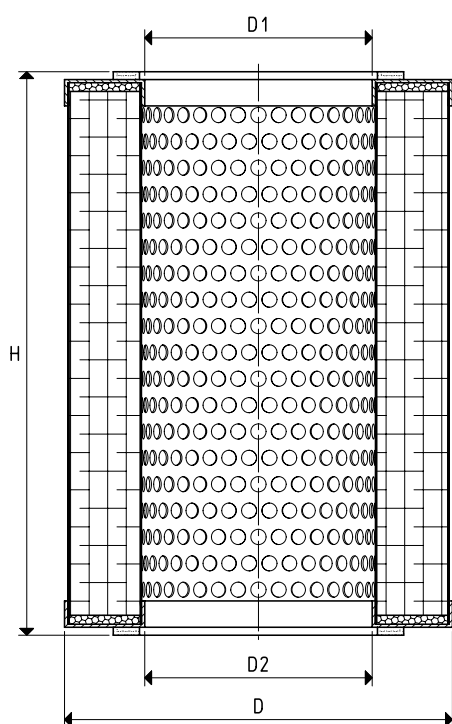

Art.	Filtre art.	D Ø	D1 Ø	D2 Ø	H	Filtering degree micron
00 FC 29	FC 60 - FC 80	152	89	89	215	5 ÷ 7
00 FC 34	FC 100	227	178	178	278	5 ÷ 7

Conversion ratio: inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$