


## STEEL WOOL FILTERING CARTRIDGES FOR FO FILTRES

The cartridges described in this page are suited for FO oil-bath suction filters.  
They are made with pressed steel wool contained in a double perforated sheet steel enclosure. Their function is to retain fine or impalpable dust impregnated with the filtre oil.

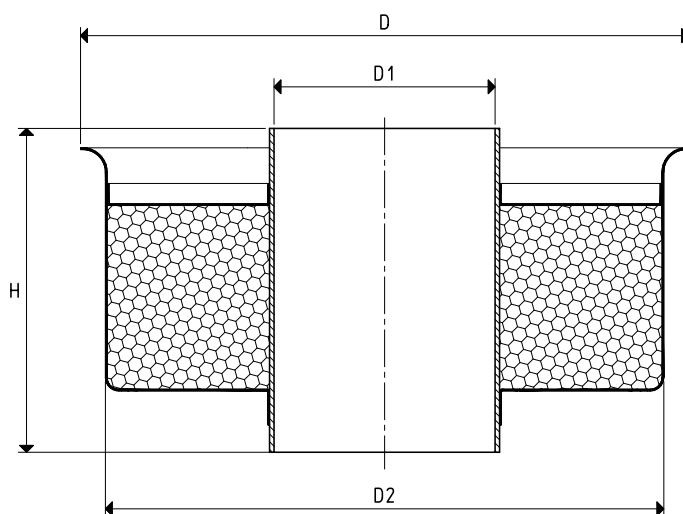

Art.	Filtre	D	D1	D2	H	Filtering degree
	art.	∅	∅	∅		(installed on the filtre)
						micron
<b>00 FO 04</b>	FO 20	110	40	103	70	≤1
<b>00 FO 09</b>	FO 30	134	49	127	72	≤1
<b>00 FO 14</b>	FO 50	165	58	155	86	≤1
<b>00 FO 19</b>	FO 60	190	66	180	104	≤1

Conversion ratio: inch =  $\frac{\text{mm}}{25.4}$ ; pounds =  $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$