

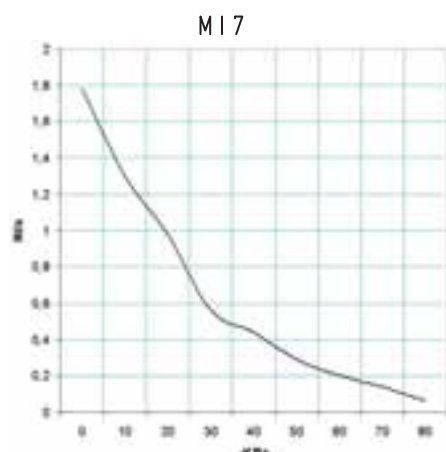
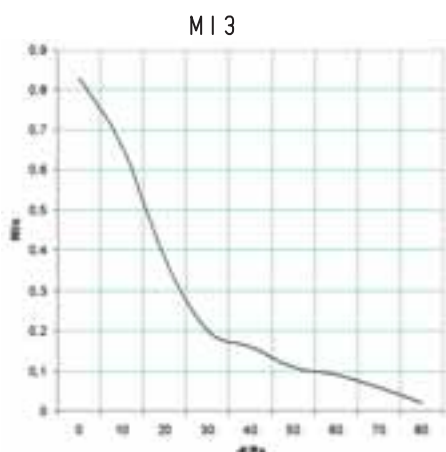


Air capacity (NI/s) at different vacuum levels (-Kpa)

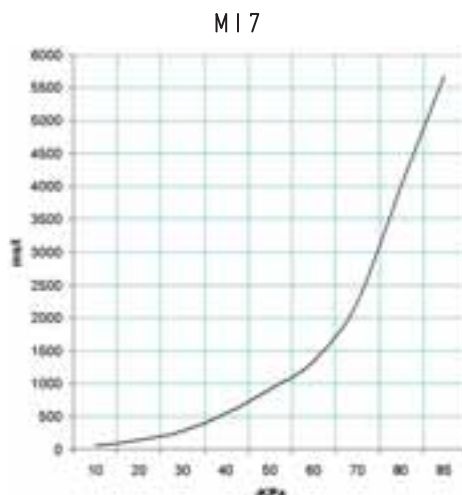

| Generator art. | Supply press. bar (g) | Air consumption NI/s | Air capacity (NI/s) at different vacuum levels (-KPa) | | | | | | | | | | Max. vacuum level -KPa |
|----------------|-----------------------|----------------------|---|------|------|------|------|------|------|------|------|----|------------------------|
| | | | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 85 | |
| MI 3 | 5.0 | 0.8 | 0.83 | 0.66 | 0.38 | 0.20 | 0.16 | 0.11 | 0.09 | 0.06 | 0.02 | 85 | |
| MI 7 | 5.0 | 1.3 | 1.78 | 1.30 | 0.98 | 0.56 | 0.44 | 0.29 | 0.20 | 0.14 | 0.06 | 85 | |

Evacuation time (ms/l = s/m³) at different vacuum levels (-Kpa)

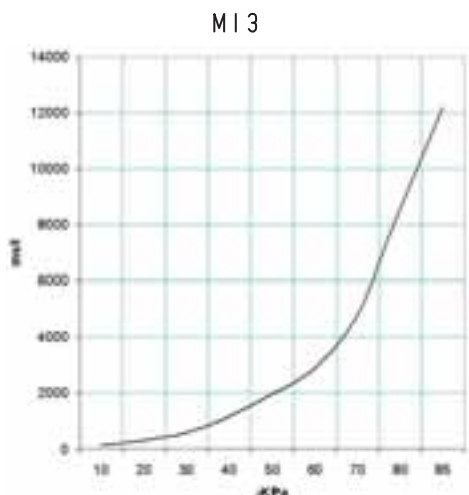

| Generator art. | Supply press. bar (g) | Air consumption NI/s | Evacuation time (ms/l = s/m³) at different vacuum levels (-KPa) | | | | | | | | | | Max. vacuum level -KPa |
|----------------|-----------------------|----------------------|---|-----|-----|------|------|------|------|------|-------|----|------------------------|
| | | | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 85 | | |
| MI 3 | 5.0 | 0.8 | 128 | 294 | 592 | 1167 | 1978 | 2889 | 4824 | 8588 | 12195 | 85 | |
| MI 7 | 5.0 | 1.3 | 59 | 137 | 275 | 543 | 921 | 1344 | 2245 | 3997 | 5676 | 85 | |

ACCESSORIES AND SPARE PARTS UPON REQUEST

| Art. | MI 3 | MI 7 |
|---|------------------|------------------|
| Sealing kit and reed valve | art. 00 KIT MI 3 | art. 00 KIT MI 7 |
| Electric connection cable with axial connector for vacuum switch | | 00 12 20 |
| Electric connection cable with radial connector for vacuum switch | | 00 12 21 |
| Electric connection cable set with built-in energy | | 00 15 202 |
| Saving device NO and connectors | | 00 15 203 |
| Electric connection cable set with built-in energy | | 12 10 10 |
| Saving device NC and connectors | | 00 15 176 |
| Digital vacuum switch | | 00 15 175 |
| Supply solenoid valve NO | | |
| Supply solenoid valve NC | | |