



SINGLE-STAGE AND MULTI-FUNCTION VACUUM GENERATORS AVG 18 and AVG 25

Air capacity (NI/s) at different vacuum levels (-Kpa)

AVG 18

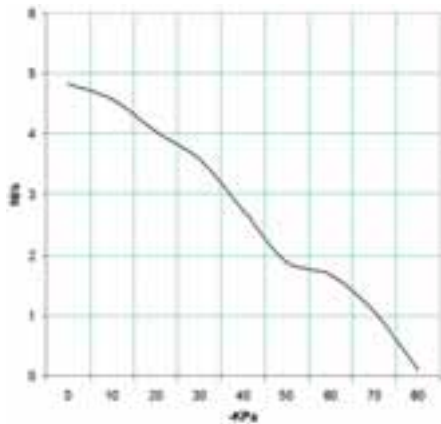


AVG 25

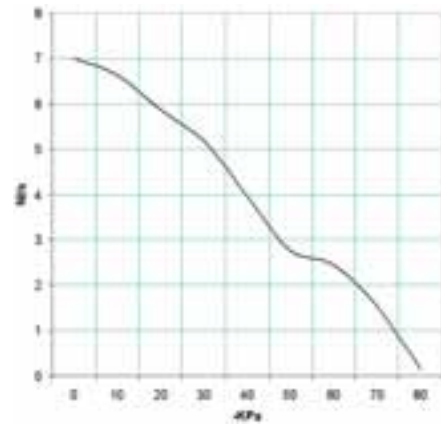


Generator art.	Supply press. bar (g)	Air consumption NI/s	Air capacity (NI/s) at different vacuum levels (-KPa)										Max. vacuum level -KPa
			0	10	20	30	40	50	60	70	80	85	
AVG 18	6.0	6.4	4.83	4.58	4.04	3.58	2.72	1.90	1.68	1.07	0.10	85	
AVG 25	6.0	9.6	7.00	6.63	5.86	5.18	3.94	2.76	2.44	1.54	0.15	85	

Evacuation time (ms/l=s/m³) at different vacuum levels (-Kpa)

AVG 18

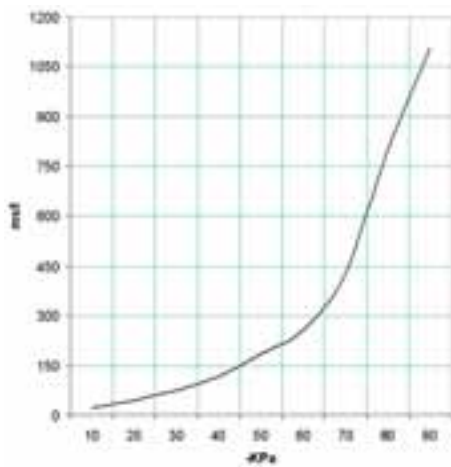

AVG 25

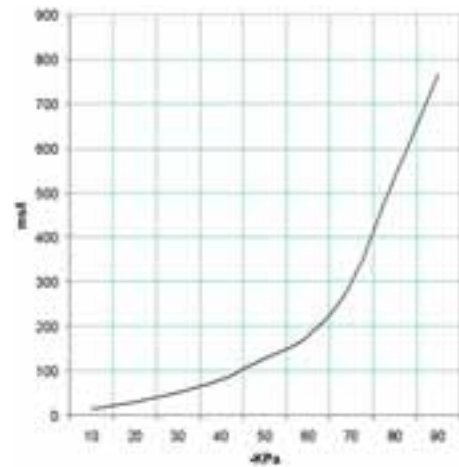

Generator art.	Supply press. bar (g)	Air consumption NI/s	Evacuation time (ms/l = s/m ³) at different vacuum levels (-KPa)										Max. vacuum level -KPa
			10	20	30	40	50	60	70	80	85		
AVG 18	6.0	6.4	22	44	75	115	185	258	430	798	1107	85	
AVG 25	6.0	9.6	15	30	52	80	128	178	297	538	764	85	

ACCESSORIES AND SPARE PARTS UPON REQUEST

Art.	AVG 18	AVG 25
Sealing kit	art.	00 KIT AVG 18
Cables with solenoid valve connectors provided with built-in electronic device in the male M2 connector	art.	00 15 309
Exhaust silencer	art.	SSX 3/4 R
Rear aluminium shockproof protection plate	art.	00 15 271
Front aluminium shockproof protection plate	art.	00 15 272
Digital micro vacuum switch	art.	12 05 11
Bistable supply solenoid valve	art.	00 15 297
Blowing solenoid valve NC	art.	00 15 175