

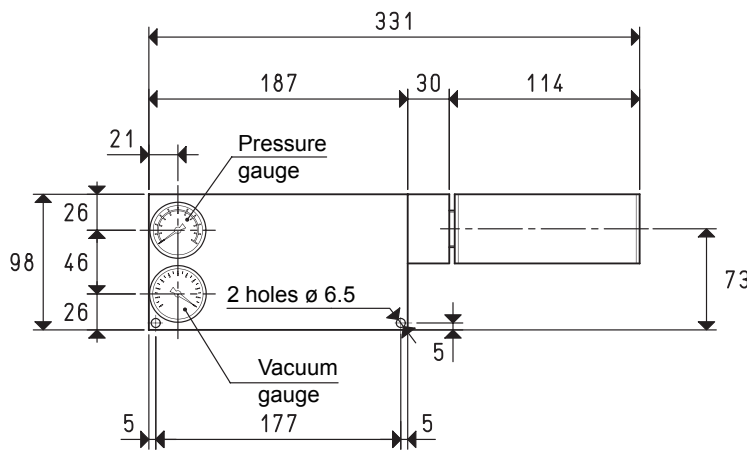


MULTI-STAGE VACUUM GENERATORS PVP 25 ÷ 75 MDX

This new range of generators represent the natural evolution of the PVP 25 ÷ 75 MD multiple ejector vacuum generators and they boast an excellent performance. In fact, given the same air consumption values and the same final vacuum level, the maximum suction capacity is increased by 10 ÷ 12% compared to the previous range. The body and lid are made with anodised aluminium, all the ejectors are made with stainless steel, as well as the fixing screws. The state of the art seal is in EPDM and is never in contact with the sucked fluid; the reed valves, on the other hand, are made with silicon as a standard and in viton, upon request. These new devices contain a housing for the installation, upon request, of a pneumatic vacuum switch, that, associated with a pneumatic slide valve and a special check valve, allows making an energy saving device. As a standard, these devices are equipped with a vacuum gauge a pressure gauge, a silencer on the exhaust and a quick coupler for the compressed air supply. This new range of vacuum generators is perfectly interchangeable with the previous one.

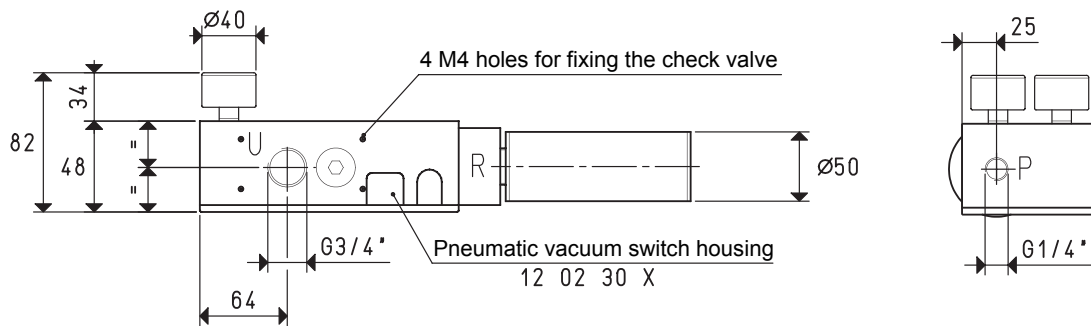

		P=COMPRESSED AIR CONNECTION		R=EXHAUST		U=VACUUM CONNECTION					
Art.		PVP 25 MDX		PVP 35 MDX		PVP 50 MDX					
Max. quantity of sucked air	cum/h	35	39	43	47	52	57	57	62	68	
Max. vacuum level	-KPa	65	82	90	65	82	90	65	82	90	
Final pressure	mbar abs.	350	180	100	350	180	100	350	180	100	
Supply pressure	bar (g)	4	5	6	4	5	6	4	5	6	
Air consumption	NI/s	2.3	2.8	3.2	3.4	4.1	4.8	4.7	5.6	6.5	
Working temperature	°C			-20 / +80				-20 / +80		-20 / +80	
Noise level	dB(A)			58				58		60	
Weight	Kg			1.71				1.73		1.75	
Spare parts											
Sealing kit and reed valve	art.			00 KIT PVP 25 MDX				00 KIT PVP 35 MDX		00 KIT PVP 50 MDX	
Vacuum gauge	art.			09 03 15				09 03 15		09 03 15	
Pressure gauge	art.			09 03 25				09 03 25		09 03 25	
Silencer	art.			SSX 3/4"				SSX 3/4"		SSX 3/4"	

Note: All the vacuum data indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and are obtained with a constant supply pressure.