



VACUUM CUP SUCTION PLATES WITH SHUT-OFF VALVES PVE and P2V2E, FOR OCTOPUS SYSTEMS

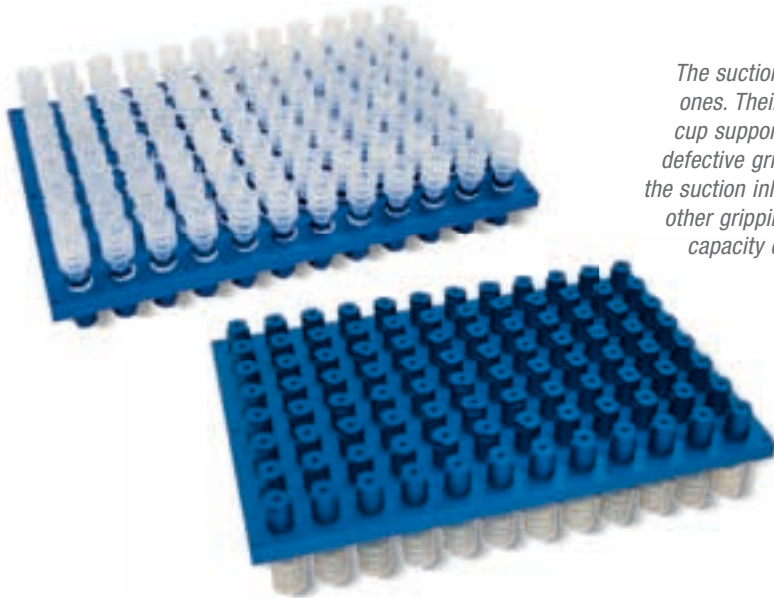

The suction plates described in this page are the same as the previous ones. Their distinctive features are the shut-off valves inserted in each cup support connection. In absence of an object to grip or in case of a defective grip of the foam rubber, the shut-off valves automatically close the suction inlet, thus preventing the vacuum level from decreasing on the other gripping holes. This feature allows reducing the vacuum generator capacity compared to the OCTOPUS systems without valves, all to the benefit of energy saving.

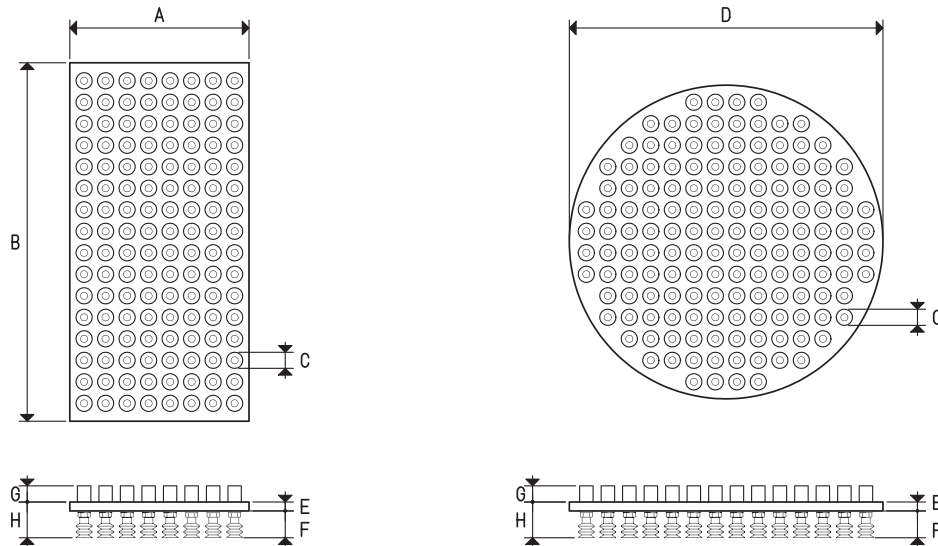

Art.	Force	A	B	C	D	E	F	G	H	Example	Nr. of Valves and	Weight
	Kg			∅	∅					Vacuum cup art.	cups	Kg
PVE 20 30	60.5	200	300	18	---	10	36	18	46	01 18 29	96	2.09
PVE 20 40	80.6	200	400	18	---	10	36	18	46	01 18 29	128	2.82
PVE 20 60	121.0	200	600	18	---	10	36	18	46	01 18 29	192	4.18
PVE 30 30	90.7	300	300	18	---	10	36	18	46	01 18 29	144	3.24
PVE 30 40	121.0	300	400	18	---	10	36	18	46	01 18 29	192	4.18
PVE 30 50	151.2	300	500	18	---	10	36	18	46	01 18 29	240	6.27
PVE 40 40	167.0	400	400	18	---	10	36	18	46	01 18 29	256	5.64
PVE 40 60	242.0	400	600	18	---	10	36	18	46	01 18 29	384	8.36
PVE 40 100	413.3	400	1000	18	---	10	36	18	46	01 18 29	656	14.45
PVE 60 80	483.9	600	800	18	---	10	36	18	46	01 18 29	768	17.06
PVE 60 120	740.8	600	1200	18	---	10	36	18	46	01 18 29	1176	25.97
PVE 80 100	852.4	800	1000	18	---	10	36	18	46	01 18 29	1353	29.56
PVE DO 35	93.2	---	---	18	350	10	36	18	46	01 18 29	148	3.29
PVE DO 50	194.0	---	---	18	500	10	36	18	46	01 18 29	308	6.45

Note: The code PVE... exclusively indicates the suction plate with the vacuum cup supports screwed on it and the built-in shut-off valves.

The vacuum cups indicated in the table or freely chosen are not integral part of the suction plate and therefore, must be ordered separately.