
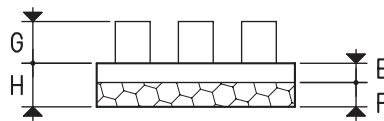


SUCTION PLATES WITH SHUT-OFF VALVES PXE and P2XE, FOR OCTOPUS GRIPPING BARS

The suction plates described in this page are the same as the previously described ones. Their distinctive features are the shut-off valves inserted in each cup support connection. In absence of an object to grip or in case of a defective grip of the foam rubber, the shut-off valves automatically close the suction inlet, thus preventing the vacuum level from decreasing on the other gripping holes. This feature allows reducing the vacuum generator capacity compared to the OCTOPUS systems without valves, all to the benefit of energy saving.

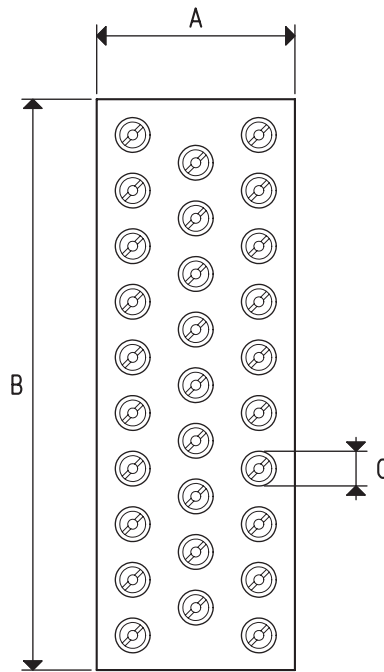

Art.	Force Kg	A	B	C Ø	E	F	G	H	Nr. of Valves	Weight Kg
PXE 08 60	43.7	80	600	20	10	20	18	30	56	1.69
PXE 08 80	60.0	80	800	20	10	20	18	30	77	2.25
PXE 12 60	42.1	120	600	20	10	20	18	30	54	2.53
PXE 12 80	57.7	120	800	20	10	20	18	30	74	3.38
PXE 12 100	73.3	120	1000	20	10	20	18	30	94	4.22
PXE 12 120	88.9	120	1200	20	10	20	18	30	114	5.07
P2XE 08 60	43.7	80	600	20	10	30	18	40	56	1.72
P2XE 08 80	60.0	80	800	20	10	30	18	40	77	2.29
P2XE 12 60	42.1	120	600	20	10	30	18	40	54	2.58
P2XE 12 80	57.7	120	800	20	10	30	18	40	74	3.44
P2XE 12 100	73.3	120	1000	20	10	30	18	40	94	4.30
P2XE 12 120	88.9	120	1200	20	10	30	18	40	114	5.16