
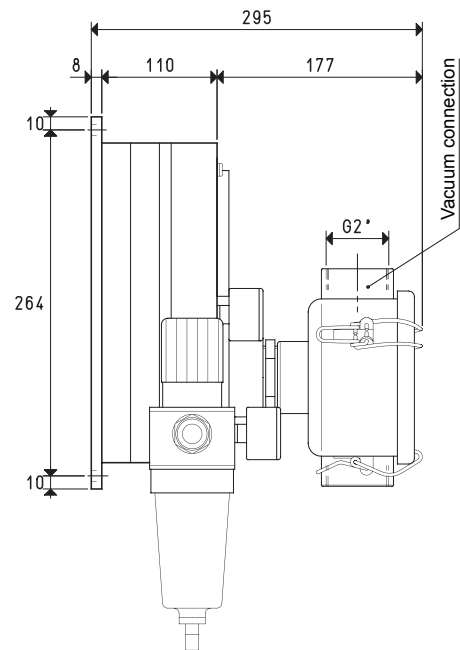


PNEUMATIC SUCTION PUMPS PA 250 and PA 300

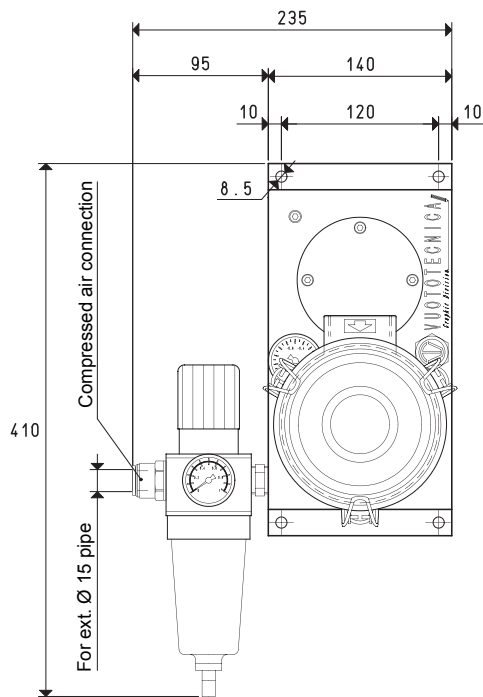

Art.		PA 250					
Supply pressure	bar (g)	1	2	3	4	5	6
Max. vacuum level	-KPa	15	35	55	70	85	90
Air consumption	NI/s	7.5	11.2	15.0	17.3	20.7	24.0
Quantity of sucked air	cum/h	100	145	190	224	252	280
Weight	Kg	8.1					
Art.		PA 300					
Supply pressure	bar (g)	1	2	3	4	5	6
Max. vacuum level	-KPa	15	35	55	70	85	90
Air consumption	NI/s	9.0	13.5	18.1	20.4	24.8	29.0
Quantity of sucked air	cum/h	106	160	213	240	290	320
Weight	Kg	8.1					
Working temperature	°C	-20 / +80					

Note: All the values in the table are valid at a normal atmospheric pressure of 1013 mbar (g) and obtained with a constant supply pressure.

Conversion ratio: inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6}$ = $\frac{\text{Kg}}{0.4536}$

GAS-NPT thread adapters available at page 1.117