
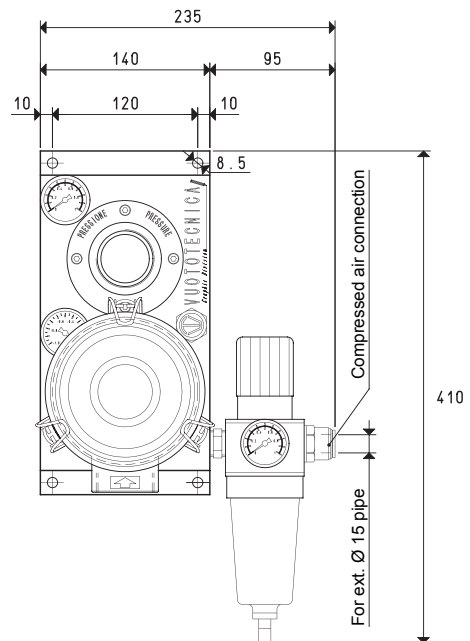


PNEUMATIC BLOWING PUMPS PS 140, PS 170 and PS 200

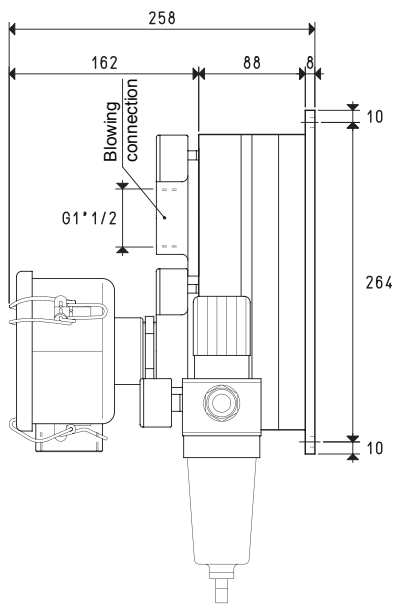

Art.		PS 140					
Supply pressure	bar (g)	1	2	3	4	5	6
Max. blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7	0.8
Air consumption	NI/s	4.1	6.2	8.3	9.6	11.4	13.0
Quantity of blown air	cum/h	59	102	135	160	181	199
Weight	Kg	7.3					
Art.		PS 170					
Supply pressure	bar (g)	1	2	3	4	5	6
Max. blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7	0.8
Air consumption	NI/s	5.1	7.7	10.3	12.1	14.2	16.3
Quantity of blown air	cum/h	71	125	165	194	219	240
Weight	Kg	7.3					
Art.		PS 200					
Supply pressure	bar (g)	1	2	3	4	5	6
Max. blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7	0.8
Air consumption	NI/s	6.0	9.1	12.2	14.2	16.9	19.4
Quantity of blown air	cum/h	81	142	185	221	249	270
Weight	Kg	7.3					
Working temperature	°C	-20 / +80					

Note: All the values in the table are valid at a normal atmospheric pressure of 1013 mbar and obtained with a constant supply pressure.

Conversion ratio: inch = $\frac{mm}{25.4}$; pounds = $\frac{g}{453.6}$ = $\frac{Kg}{0.4536}$

GAS-NPT thread adapters available at page 1.117

3D drawings available at www.vuototecnica.net