
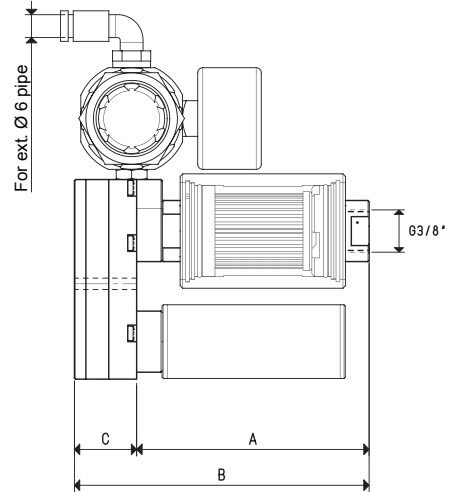
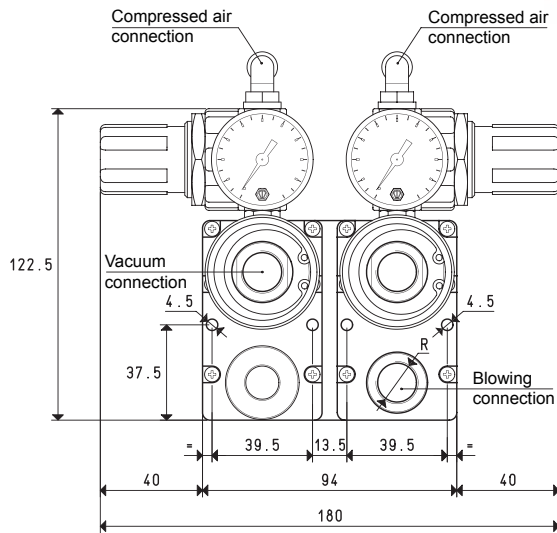


SMALL PNEUMATIC COMBINED SUCTION PUMPS PA and BLOWING PUMPS PS

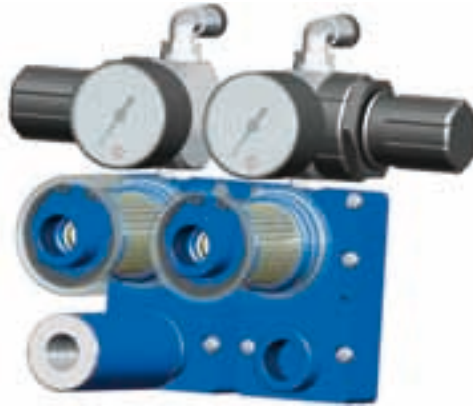

Art.	PA 10					Art.	PS 10						
Supply pressure	bar (g)	1	2	3	4	5	Supply pressure	bar (g)	1	2	3	4	5
Max. vacuum level	-kPa	20	42	62	80	85	Max. blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7
Air consumption	NI/s	0.5	0.9	1.2	1.6	1.9	Air consumption	NI/s	0.5	0.9	1.2	1.6	1.9
Quantity of sucked air	cum/h	4.0	6.0	7.7	8.5	9.4	Quantity of blown air	cum/h	5.8	9.2	12.0	14.2	16.2
A		94					A		94				
B		118.5					B		118.5				
C		24.5					C		24.5				
Weight	Kg	0.59					Weight	Kg	0.49				
Art.	PA 14					Art.	PS 14						
Supply pressure	bar (g)	1	2	3	4	5	Supply pressure	bar (g)	1	2	3	4	5
Max. vacuum level	-kPa	20	42	62	80	85	Max. blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7
Air consumption	NI/s	0.9	1.3	1.7	2.1	2.5	Air consumption	NI/s	0.9	1.3	1.7	2.1	2.5
Quantity of sucked air	cum/h	6.0	8.0	10.2	11.5	12.6	Quantity of blown air	cum/h	9.2	12.6	16.3	19.0	21.6
A		94					A		94				
B		118.5					B		118.5				
C		24.5					C		24.5				
Weight	Kg	0.60					Weight	Kg	0.50				
Art.	PA 18					Art.	PS 18						
Supply pressure	bar (g)	1	2	3	4	5	Supply pressure	bar (g)	1	2	3	4	5
Max. vacuum level	-kPa	20	42	62	80	85	Max. blowing pressure	bar (g)	0.1	0.2	0.3	0.5	0.7
Air consumption	NI/s	1.2	1.7	2.3	2.9	3.6	Air consumption	NI/s	1.2	1.7	2.3	2.9	3.6
Quantity of sucked air	cum/h	8.0	11.5	14.8	16.5	18.0	Quantity of blown air	cum/h	12.3	17.6	23.0	26.9	31.0
A		94					A		94				
B		128.5					B		128.5				
C		34.5					C		34.5				
Weight	Kg	0.62					Weight	Kg	0.52				
Working temperature	°C	-20 / +80					Working temperature	°C	-20 / +80				

Note: All the values in the table are valid at a normal atmospheric pressure of 1013 mbar and obtained with a constant supply pressure.