


[Small cup holders with compact stroke]

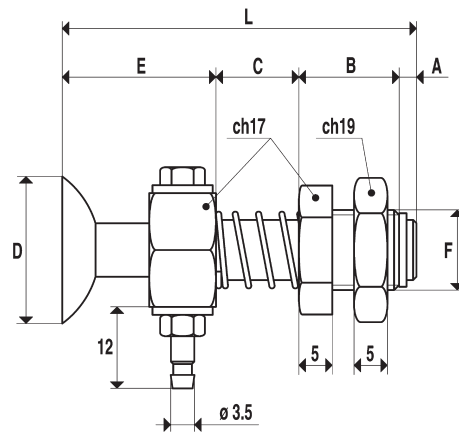

Cup holder with straight hose tail for plastic hose

Art.	Force Kg.	A	B	C	D Ø	E	F Ø	L	Art. Cup
20 10 10	0.19	2.6	15	12.4	10	21	12x1.25	51	01 10 10
20 12 10	0.28	2.6	15	12.4	12	21	12x1.25	51	01 12 10
20 15 10	0.44	2.6	15	12.4	15	22	12x1.25	52	01 15 10
20 18 10	0.63	2.6	15	12.4	18	22	12x1.25	52	01 18 10
20 20 10	0.78	2.6	15	12.4	20	22	12x1.25	52	01 20 10
20 22 10	0.95	2.6	15	12.4	22	23	12x1.25	53	01 22 10
20 25 10	1.23	2.6	15	12.4	25	26	12x1.25	56	01 25 15
20 30 10	1.76	2.6	15	12.4	30	26	12x1.25	56	01 30 15

They consist of:

- A brass stem for fastening the cup.
- A hexagonal threaded sleeve, equipped with a nut, for the quick assembly of the cup holder to the lifting frame.
- A spring to cushion the impact of the cup and to keep at the same time a constant pressure with the load to be lifted.
- A fitting for the connection to the suction hose.

The shorter stroke and their particular shape have permitted a further reduction of size and weight, in comparison with the normal small cup holders. They are suitable for small cups from a diameter of 10 mm to 30 mm.

N.B.

Cups are not included in the following part numbers of the cup holder and therefore, they must be ordered separately.