


## [Special cup holders]

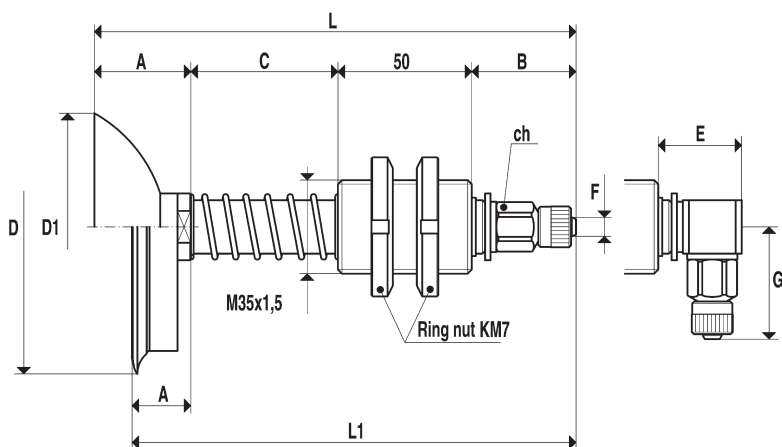

Developed for lifting heavy bodies and to support hard and continuous duties in particularly dusty or damp environments, our special cup holders consist of:

- A chromium plated steel stem for the fastening of the cup, complete with rapid fitting for the connection to the suction hose.
- A threaded support in brass, with self-lubricating bushes, equipped with two ring nuts for fastening the cup holder to the machine.
- A spring to cushion the impact of the cup with the load to be lifted.
- A cup, that can be supplied in different shapes and sizes and different compounds, to be specified when ordering.

Cup holder with rapid straight fitting for plastic hose  $\varnothing 6 \times 8$

Art.	Force Kg.	A	B	*C	D Ø	D1 Ø	E Ø	F Ø	G	ch	L	L1	Art. Cup
06 85 10	14.18	46	39	55	--	85	31	6	43	17	190	---	01 85 10
06 85 15	14.18	22	39	55	85	--	31	6	43	17	---	166	01 85 15
06 90 24	15.89	29	39	55	--	90	31	6	43	17	173	---	08 90 24
06 100 40	19.62	31	39	55	--	100	31	6	43	17	175	---	08 100 40
06 100 50	19.62	35.5	39	55	--	100	31	6	43	17	179.5	---	08 100 50
06 110 10	23.74	22	39	55	114	--	31	6	43	17	---	166	01 110 10
06 110 15	23.74	31	39	55	110	--	31	6	43	17	---	175	08 110 15
06 110 24	23.74	29	39	55	--	110	31	6	43	17	173	---	08 110 24
06 150 10	45.00	28	39	55	154	--	31	6	43	17	---	172	01 150 10
06 150 36	45.00	41	39	55	--	150	31	6	43	17	185	---	08 150 36

N.B.

Cups are not included in the following part numbers of the cup holder and therefore, they must be ordered separately.

The real strokes are:

C = 55 mm 37  
C = 110 mm 84

N.B. - L-type fitting is supplied only upon request. \* Available also with size "C" mm. 110.