




# STEEL WOOL FILTERING CARTRIDGES FOR FO FILTERS

The cartridges described on this page are suited for FO oil-bath suction filters. They are made with pressed steel wool contained in a double perforated sheet steel enclosure. Their function is to retain fine or impalpable dust impregnated with the filter oil.

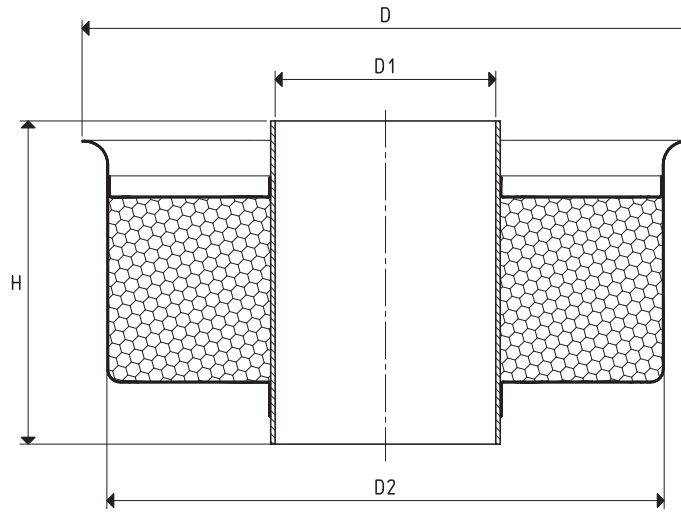

Item	For filter item	D ∅	D1 ∅	D2 ∅	H	Level of filtration (installed on the filter) micron
<b>00 FO 04</b>	FO 20	110	40	103	70	≤1
<b>00 FO 09</b>	FO 30	134	49	127	72	≤1
<b>00 FO 14</b>	FO 50	165	58	155	86	≤1
<b>00 FO 19</b>	FO 60	190	66	180	104	≤1

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

$$\text{inch} = \frac{\text{mm}}{25.4} ; \text{pounds} = \frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$$