



### VACUUM CUP

Item	<b>Force</b> Kg	<b>Volume</b> cm³	<b>A</b> Ø	<b>B</b> ∅	<b>D</b> Ø	Н	Compound
01 220 10 A	78.5	203.4	180	180	220	20	oil-resistant rubber

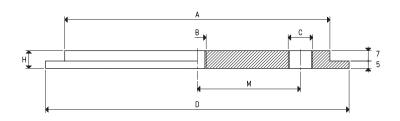

#### SUPPORT

Item	<b>A</b> Ø	<b>B</b> Ø	<b>C</b> Ø	<b>D</b> Ø	Н	М	Support material	For vacuum cup item	<b>Weight</b> Kg
00 08 37	180	M12	G3/8"	206	12	70	aluminium	01 220 10 A	0.95

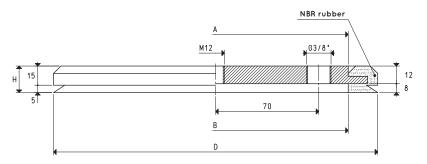


# VACUUM CUP WITH SUPPORT

Item	<b>Force</b> Kg	<b>A</b> Ø	<b>B</b> Ø	<b>D</b> Ø	Н	Vacuum cup item	<b>Support</b> item	<b>Weight</b> Kg
08 220 10 A	78.5	180	180	220	20	00 08 37	01 220 10 A	1.12

Note: The force of the vacuum cups indicated in the table represents 1/3 of the value of the theoretical force calculated at a level of vacuum of -75 KPa and a factor of safety 3. Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch =  $\frac{mm}{25.4}$ ; pounds =  $\frac{g}{453.6}$  =  $\frac{Kg}{0.4536}$  Adapters for GAS - NPT threading available on page 1.130




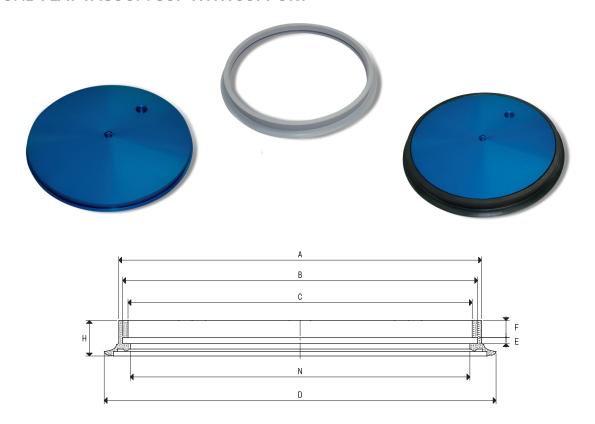

#### VACUUM CUP


Item	<b>Force</b> Kg	<b>Volume</b> cm³	<b>A</b> Ø	<b>B</b> Ø	<b>C</b> Ø	<b>D</b> Ø	E	F	Н	N Ø
01 250 20 *	122.60	200.0	235	227	220	254	4	11	23	220

<sup>\*</sup> Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicone

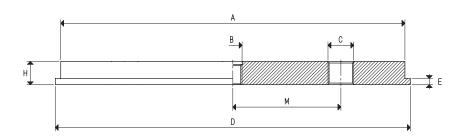

#### SUPPORT

Item	<b>A</b> Ø	<b>B</b> Ø	<b>C</b> Ø	D Ø	E	Н	М	For vacuum cup item	Support material	<b>Weight</b> Kg
00 08 115	223	M12	G3/8"	230	4	15	70	01 250 20	aluminium	1.65

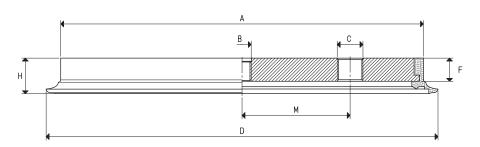

## VACUUM CUP WITH SUPPORT

ltem	<b>Force</b> Kg	<b>A</b> Ø	<b>B</b> Ø	C Ø	<b>D</b> Ø	F	Н	М	Vacuum cup item	<b>Support</b> item	<b>Weight</b> Kg
08 250 20 *	122.60	237	M12	G3/8"	254	15	23	70	01 250 20	00 08 115	1.78

<sup>\*</sup> Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicone

Note: The force of the vacuum cups indicated in the table represents 1/3 of the value of the theoretical force calculated at a level of vacuum of -75 KPa and a factor of safety 3.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch =  $\frac{mm}{25.4}$ ; pounds =  $\frac{g}{453.6}$  =  $\frac{Kg}{0.4536}$  Adapters for GAS - NPT threading available on page 1.130