




HOSE ENDS

Our hose ends are traditional barbed nickel-plated and brass fittings. They are suited for connecting smooth or reinforced flexible hoses with an internal diameter up to 76 mm.

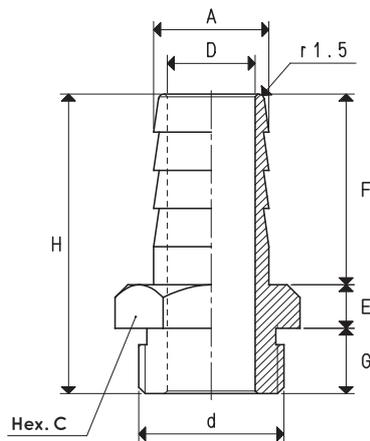

Item	d Ø	A Ø	C	D Ø	E	F	G	H
RS 1/4"	G1/4"	9.0	17	5.0	5	18	12	35
RS 3/8"	G3/8"	13.0	19	9.0	5	20	8	33
RS 1/2"	G1/2"	16.0	23	12.0	5	25	10	40
RS 3/4"	G3/4"	21.0	28	16.0	8	35	12	55
RS 1"	G1"	27.0	36	22.0	8	35	12	55
RS 1" 1/4	G1" 1/4	35.0	45	28.0	10	42	15	67
RS 1" 1/2	G1" 1/2	40.0	50	33.0	10	45	15	70
RS 2"	G2"	51.5	70	43.5	8	48	19	75
RS 3"	G3"	76.5	100	66.5	10	60	30	100

Note: The hose end connectors listed in this table are compatible with the TPR series vacuum hoses, shown on page 6.04.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adapters for GAS - NPT threading available on page 1.134