





THREADED GRUB SCREWS WITH CALIBRATED HOLE

These threaded grub screws with calibrated hole are used to reduce the cup suction section, thus reducing vacuum losses in case the cup fails to grip. They are made of brass and can be inserted in all the cup supports set for this application.



| Item | A Ø | D Ø | F | H | Grub screw material | Weight g |
|-----------|--------|--------|---|----|---------------------|-------------|
| 00 08 122 | M8 | 0.9 | 5 | 11 | brass | 2.5 |
| 00 08 121 | M8 | 1.2 | 5 | 11 | brass | 2.4 |
| 00 08 120 | M8 | 1.5 | 5 | 11 | brass | 2.3 |

| Item | A Ø | D Ø | F | H | Grub screw material | Weight g |
|-----------|--------|--------|---|----|---------------------|-------------|
| 00 08 164 | G1/8" | 1.2 | 5 | 7 | brass | 3.0 |
| 00 08 165 | G1/8" | 1.5 | 5 | 7 | brass | 3.0 |
| 00 08 176 | G1/4" | 1.2 | 5 | 10 | brass | 4.0 |
| 00 08 334 | G1/8" | 3.0 | 4 | 7 | brass | 4.0 |



ADAPTERS


These standard accessories offer the user different assembly options.

The galvanised steel or brass adapters screwed onto the standard vacuum cup support connections can vary the threads from gas to metric or vice-versa, from male to female or vice-versa, in addition of course to increasing or decreasing the size of their threaded diameter.




MF ADAPTER

| Item | D Ø | d Ø | H | Support material | Weight g |
|-----------|----------|--------|----|------------------|-------------|
| 00 08 130 | G1/4" | M10 | 14 | steel | 4.0 |
| 00 08 131 | G3/8" | M10 | 14 | steel | 12.0 |
| 00 08 230 | G3/8" | G1/4" | 14 | steel | 6.0 |
| 00 08 254 | 1/4" NPT | M10 | 14 | steel | 3.9 |
| 00 08 255 | 3/8" NPT | M10 | 14 | steel | 11.9 |
| 00 08 258 | 3/8" NPT | G1/4" | 14 | steel | 5.9 |



MM AND MF ADAPTER

| Item | D Ø | d Ø | E | F | G | H | Adapter material | Weight g |
|-----------|--------|--------|----|----|----|----|------------------|-------------|
| 00 08 129 | M12 | G1/4" | 15 | 14 | 11 | 40 | brass | 58.0 |
| 00 08 296 | M12 | G3/8" | 18 | -- | 10 | 28 | brass | 34.0 |
| 00 08 297 | G1/4" | M12 | 16 | -- | 11 | 27 | brass | 40.0 |

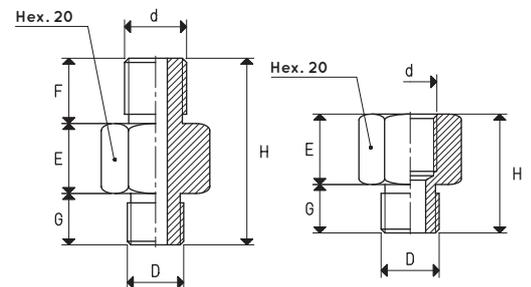

Item 00 08 129

Item 00 08 296
Item 00 08 297

FF ADAPTER FOR JOINT COUPLINGS GS

| Item | D Ø | E | F | G Ø | H | Adapter material | Weight g |
|-----------|--------|----|------|--------|----|------------------|-------------|
| 00 08 54 | M10 | 13 | 13.5 | M5 | 36 | brass | 72 |
| 00 08 251 | M8 | 16 | 15.0 | G1/8" | 48 | brass | 102 |
| 00 08 252 | M12 | 16 | 15.0 | G1/8" | 48 | brass | 90 |

