



MULTI-STAGE VACUUM GENERATORS M 10, M 14 and M 18

Air capacity (NI/s) at different vacuum levels (-Kpa)

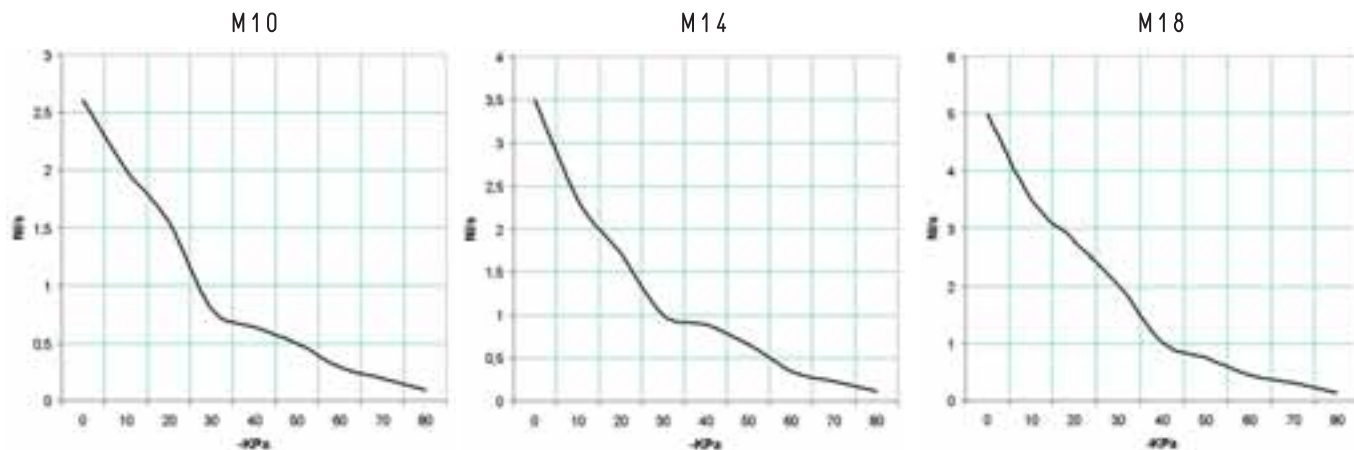

Generator art.	Supply press. bar (g)	Air consumption NI/s	Air capacity (NI/s) at different vacuum levels (-KPa)										Max. vacuum level -KPa
			0	10	20	30	40	50	60	70	80	85	
M 10	5.0	1.9	2.61	2.00	1.55	0.80	0.64	0.50	0.29	0.19	0.09	0.09	85
M 14	5.0	2.5	3.50	2.33	1.72	1.00	0.89	0.67	0.35	0.24	0.11	0.11	85
M 18	5.0	3.6	5.00	3.50	2.78	2.02	1.02	0.75	0.44	0.30	0.14	0.14	85

Evacuation time (ms/l=s/m³) at different vacuum levels (-Kpa)

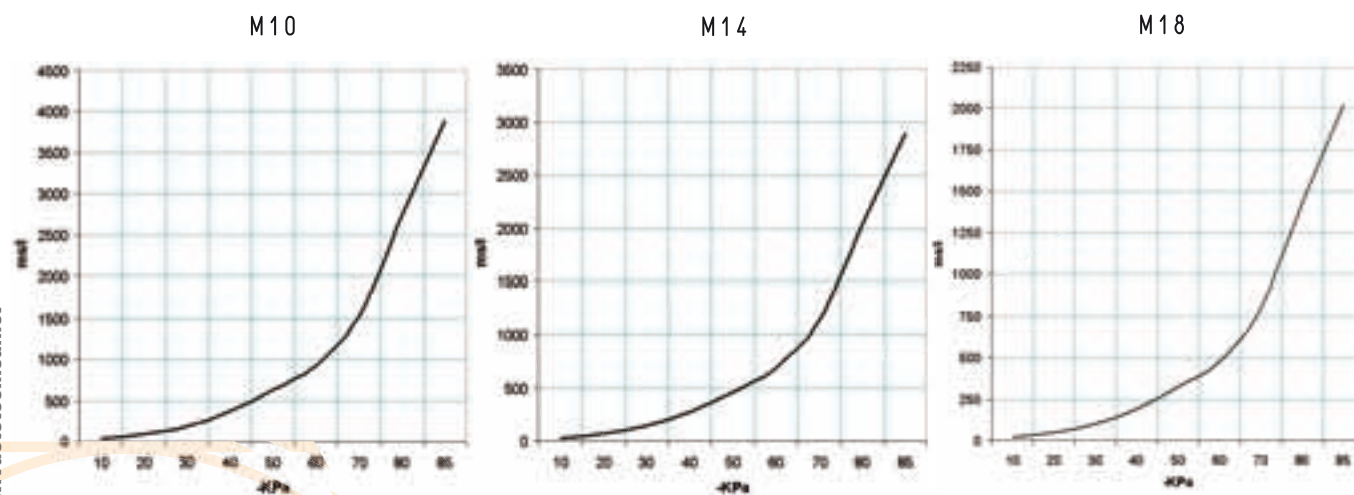

Generator art.	Supply press. bar (g)	Air consumption NI/s	Evacuation time (ms/l = s/m ³) at different vacuum levels (-KPa)										Max. vacuum level -KPa
			10	20	30	40	50	60	70	80	85	85	
M 10	5.0	1.9	40	93	188	371	629	918	1534	2731	3878	3878	85
M 14	5.0	2.5	30	69	140	276	469	685	1144	2036	2892	2892	85
M 18	5.0	3.6	21	48	98	193	327	478	799	1423	2020	2020	85